

Art. 011-1511-060


Air-operated industrial pump for grease R=110:1
Mod. 1511 flanged double-effect
For drums 18-30 kg and tanks (shank length 600 mm)
Polyurethane seals
For high viscosity grease and oils

Art. 011-1511-074

Air-operated industrial pump for grease R=110:1
Mod. 1511 flanged double-effect
For drums 50-60 kg (shank length 740 mm)
Polyurethane seals
For high viscosity grease and oils


Art. 011-1511-094

Air-operated industrial pump for grease R=110:1
Mod. 1511 flanged double-effect
For drums 180-220 kg (shank length 940 mm)
Polyurethane seals
For high viscosity grease and oils

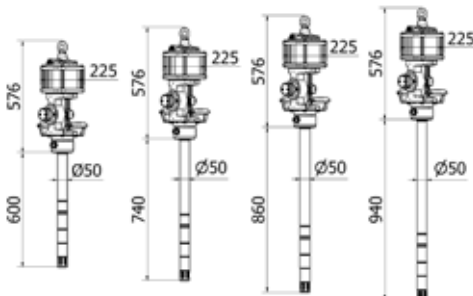

011-1511-060	26,500	0,110	1
011-1511-074	28,800	0,150	1
011-1511-094	30,900	0,150	1

Technical Data		011-1511-060	011-1511-074	011-1511-094
Compression ratio		110:1	110:1	110:1
Max supply pressure	bar	8	8	8
Air consumption 8 bar	m³/min	2,90	2,90	2,90
Air inlet connection	BSP	F 1/2"G	F 1/2"G	F 1/2"G
Grease outlet connection	BSP	F 1/2"G	F 1/2"G	F 1/2"G
Grease delivery capacity 8 bar g/min		3500	3500	3500
Noise	dB	80	80	80
Shank diameter	mm	45	45	45
Shank length	mm	600	740	940
For drums with capacity of	kg	18-30	50-60	180-220

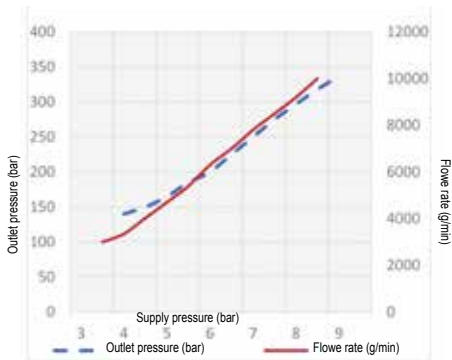

Suitable for high pressure transfer of high viscosity grease (maximum NLGI 3) over short and long distances. The double effect grants the supply of a constant and continuous flow. They are suitable for central distribution plants with multiple distribution points. The operating pressure of the pumps may vary between a minimum of 3 bar and a maximum of 8 bar. To optimize the efficiency and the life in time of our air operated pumps Meclube recommends to use filtered and lubricated air.