

Double Lever Grease Gun

G83



Double Lever gun for quick and effortless high pressure greasing applications

Screw-in cartridge works on special '**Vacuum Technology**' that ensures:

1. Full utilization of grease in the cartridge
2. Eliminates priming issues usually associated with conventional grease guns

Seal guards at both ends of the cartridge create vacuum that pulls out grease emptying the cartridge completely

Robust high tolerance aluminium die cast head
Minimal wearing parts give it a long life

No connections hence no potential leaks or contamination issues

Complete with
12" (300 mm) × 0.425" (11 mm) heavy duty hose & coupler

SPECIFICATIONS

DEVELOPS	UPTO 7,500 PSI	UPTO 517 BAR
DELIVERS	UPTO 1 OZ. / 35 STROKES	UPTO 0.8 GM / STROKE

VARIANTS




G83F-HP
For use with F type threaded grease cartridges

G83F-HP/MTO
For use with both F type and LS type threaded grease cartridges

ORDERING INFORMATION

CAT NR.	ORD NR.	CARTRIDGE CAPACITY	THREADS	BOX QTY.
		(GMS)		
G83F-HP/B	42795	500	1/8" BSPT	10
G83F-HP/M	42796	500	M10 × 1	10
◆ G83F-HP/MTO/B	42799	400 & 500	1/8" BSPT	10

◆ New

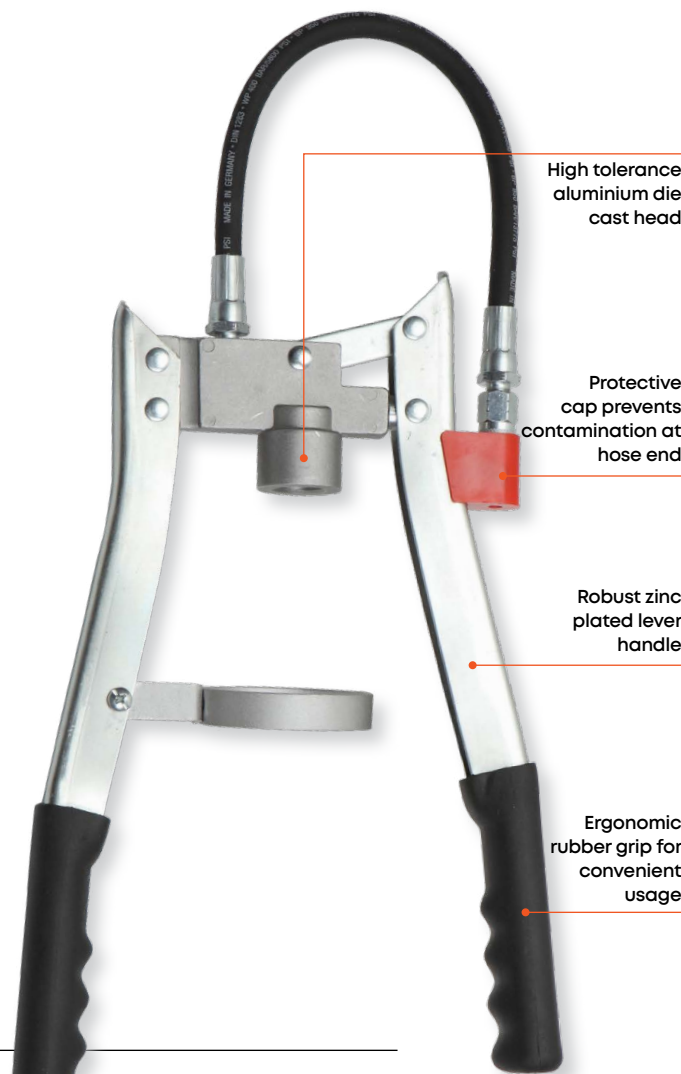

High tolerance aluminium die cast head

Protective cap prevents contamination at hose end

Robust zinc plated lever handle

Ergonomic rubber grip for convenient usage

FILLING OPTIONS

